


Product Information & Care

The information shown are suggestions or guidelines and are not intended to cover all applications or building requirements. It is the responsibility of the designer/installer to ensure that this information meets particular building conditions and/or code requirements. It is also the responsibility of the installer to ensure that all OSHA and/or safety requirements are understood and met. Majestic Metals, Inc. shall not be liable for any claim or claims which arise out of the handling or installation of the material.

Storage And Protection Bundled material should be kept dry and above ground. Material should be tarped (not with plastic) or protected from weather conditions by other means. Allow for proper air circulation to prevent moisture buildup under tarp. Elevate one end of the bundles to allow for moisture runoff. If the panels become wet, all panels should be removed from bundles and individually dried. Prolonged storage of panels is not recommended. If conditions do not permit immediate installation, extra care should be taken to protect sheets from developing white/red rust or watermarks.

Field Cutting Some field cutting and fitting of panels is to be expected by the installer and minor field corrections are a part of normal installation work. Always cut one panel at a time. For small cuts, hand-held shears or electric nibblers are recommended. For best cutting results a panel shear is recommended. Shears and snips are available through Majestic Metals. Cutting of panels and driving of fasteners will create metal shavings. These metal shavings must be swept or removed from the panel surface. Failure to do so will cause rust stains on the panel surface and will void any warranty.

CROWN PANEL FASTENER PATTERNS

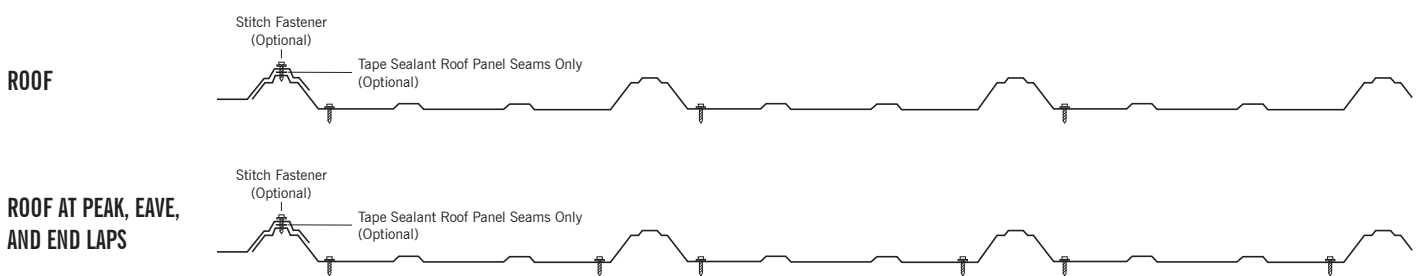

PBR/R PANEL FASTENER PATTERNS

